

100.080.035
aluNORM AS 080



technical data

Material	Aluminium
Protection class	IP 66/EN 60529, IP 67/EN 60529
Colour	RAL 7035 RAL 7035
Certifications	CSA (optional), GOST, UL (optional)
Length	80 mm
Width	80 mm
Height	60 mm
Weight (g)	320 g
Country of manufacture	Germany
Customs tariff number	76169910

aluNORM

MULTIVARIABLE DIECAST ALUMINIUM ENCLOSURES FOR INDUSTRIAL EQUIPMENT

IP 66, Optional: IP 67

aluNORM IP 66 diecast aluminium enclosures are designed to protect electrical and electronic components. The enclosures are available in four different versions with different lid and base combinations. This gives a huge variety of sizes and design options to choose from.

Uniquely, aluNORM enclosures are mounted to a wall or machine using the same screw channels as the lid fixings. This means there is more space inside for your assemblies and components. EMC shielded versions are available for the AS and AD variants, and some AF and AH variants - see ordering details. Threaded screw bosses in the lid and base enable fast installation of terminal rails, mounting plates etc. Matching cable glands and accessories are also available.

We can supply aluNORM enclosures fully customised to your requirements.

Enclosure sizes
86

Additional info
4 different variants

AS (deep bottom, flat lid)
AD (flat bottom, deep lid)
AF (flat bottom, flat lid)
AH (deep bottom, deep lid)

Compatible assembly dimensions with the polyTOP range (polyester enclosure)

Optional: Specially developed external mounting brackets made from die-cast aluminium, available from AS 080

Enclosure
Diecast aluminium

EN AC 44300/EN AC-44200 (DIN EN 1706)

1° mould slope for casting ejection > internal circumference dimensions decrease by 1° towards enclosure bottom.

Fastening

Space-saving single-channel technology for lid and fastening screws outside of the enclosure interior
Even square enclosures can be screwed into any position without problems, thanks to the symmetrical arrangement

Internal mounting

Fastening thread in lateral bars on the floor of the enclosure and a fastening option and/or thread in the lid (both depending on the variant)

Mounting plate made from galvanised sheet steel available as an accessory

Ingress protection
IP 66 / EN 60529

Optional: IP 67 / EN 60529

Gasket
Chloroprene O-ring gasket (CR)

or TPE moulded gasket, silicone-free

Optional: Silicone gasket

Lid screws
Stainless steel 1.4567, captive

Surface
Powder coating RAL 7035 light grey

Optional: Special colours


Optional: Corrosion protection

Customising
Learn more about our full customising service for installation-ready enclosures


Enclosure series aluNORM

Type: AS 080

Material-No.: 100.080.035

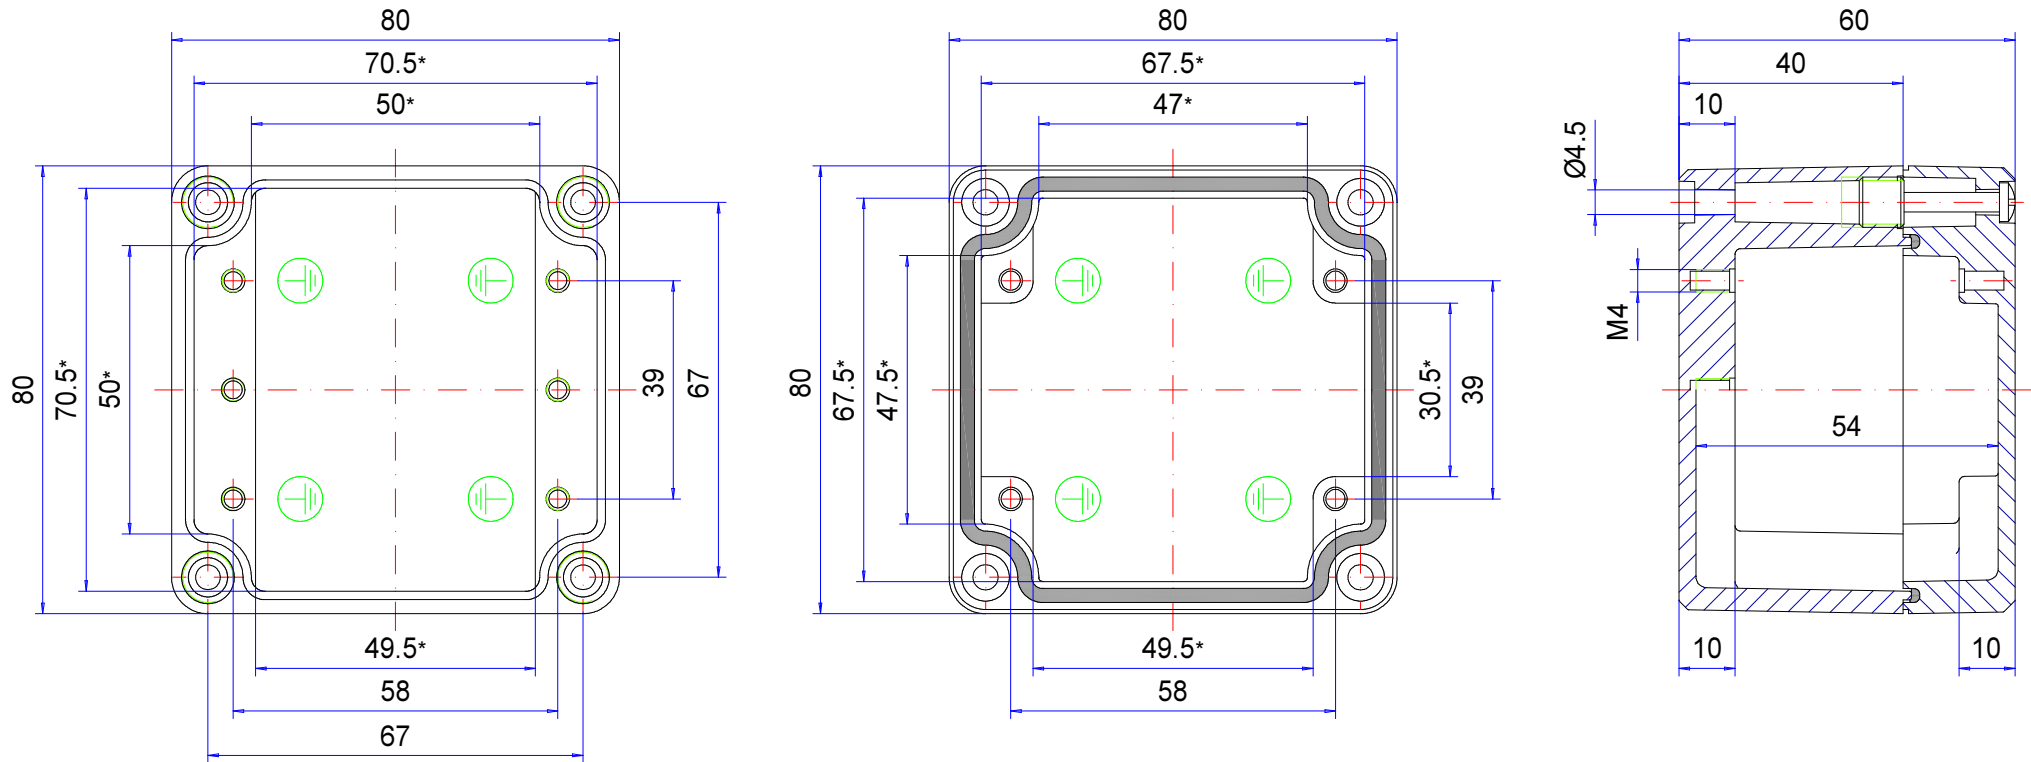

* Please note: Mould slope for casting ejection, dimensions in the amount of the bottom!

Enclosure material	GD-AI Si 12 (DIN 1725)		Weight	320 g
Lid screws	4x stainless steel 1.4567 (V2A), captive		Earthing screws	4x M4x6, copper-plated
Gasket	1x TPE moulded gasket, silicone-free, black		Coating	Powder coating RAL 7035, light grey
Ingress protection	IP66 EN 60529		Tolerance	DIN CEN ISO/TS 8062-2 (outside dimensions ± 0,5mm)